

# C9370C

## torno para frenos

- The lathe uses precision electric DC servo motors designed to meet the demanding requirement of industrial motion control.
- The "Change Adapter" system eliminates the need for conventional bell clamps and cones and features built-in springs ensure you don't lose them.
- The precision twin cutter tools and a quick drum to rotor changeover to help increase your service capability.
- Infinitely variable spindle and cross feed speed settings allow for quick rough and precision finish cuts.
- A convenient top storage tray means you can easy to take that are your favorite adapters and tools.
- Separate motors on the drum and rotor feed help maximize the main motor's efficiency.
- The variety of adapters lets you machine all standard and composite rotors for foreign and domestic cars and light trucks.
- Positive rake cutter tip angle provides for a one pass finish virtually every time, allowing you to complete your work fast.

### Especificaciones técnicas

Modelo	C9370C
Avance del eje	9.875"(251mm)
Diametro rotor	7"-18"(180mm-457mm)
Diametro del Tambo	6"-28" (152-711mm)
Motor	110V/220V/380V.50/60Hz
Velocidad del Eje	70,88,118 rpm
Espesor del Rotor	4" (48mm)
Profundidad del Tambor	9.875"(102mm)
Peso de Embarque	350 kg
Dimension(L×W×H)	1100mm×1070mm×1140 mm

### Accesorios Opcional


1#(26 PCS)kit de adaptadores para 1/2 ton

2#(28 PCS)kit de adaptadores para 3/4 ton

3#(23 PCS)kit de adaptadores para 1 ton



1#

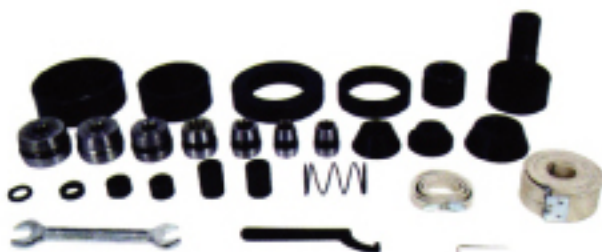

2#



3#

